


KONE MonoSpace® Home DX

Elevate everyday living

The machine-room-less
elevator for home



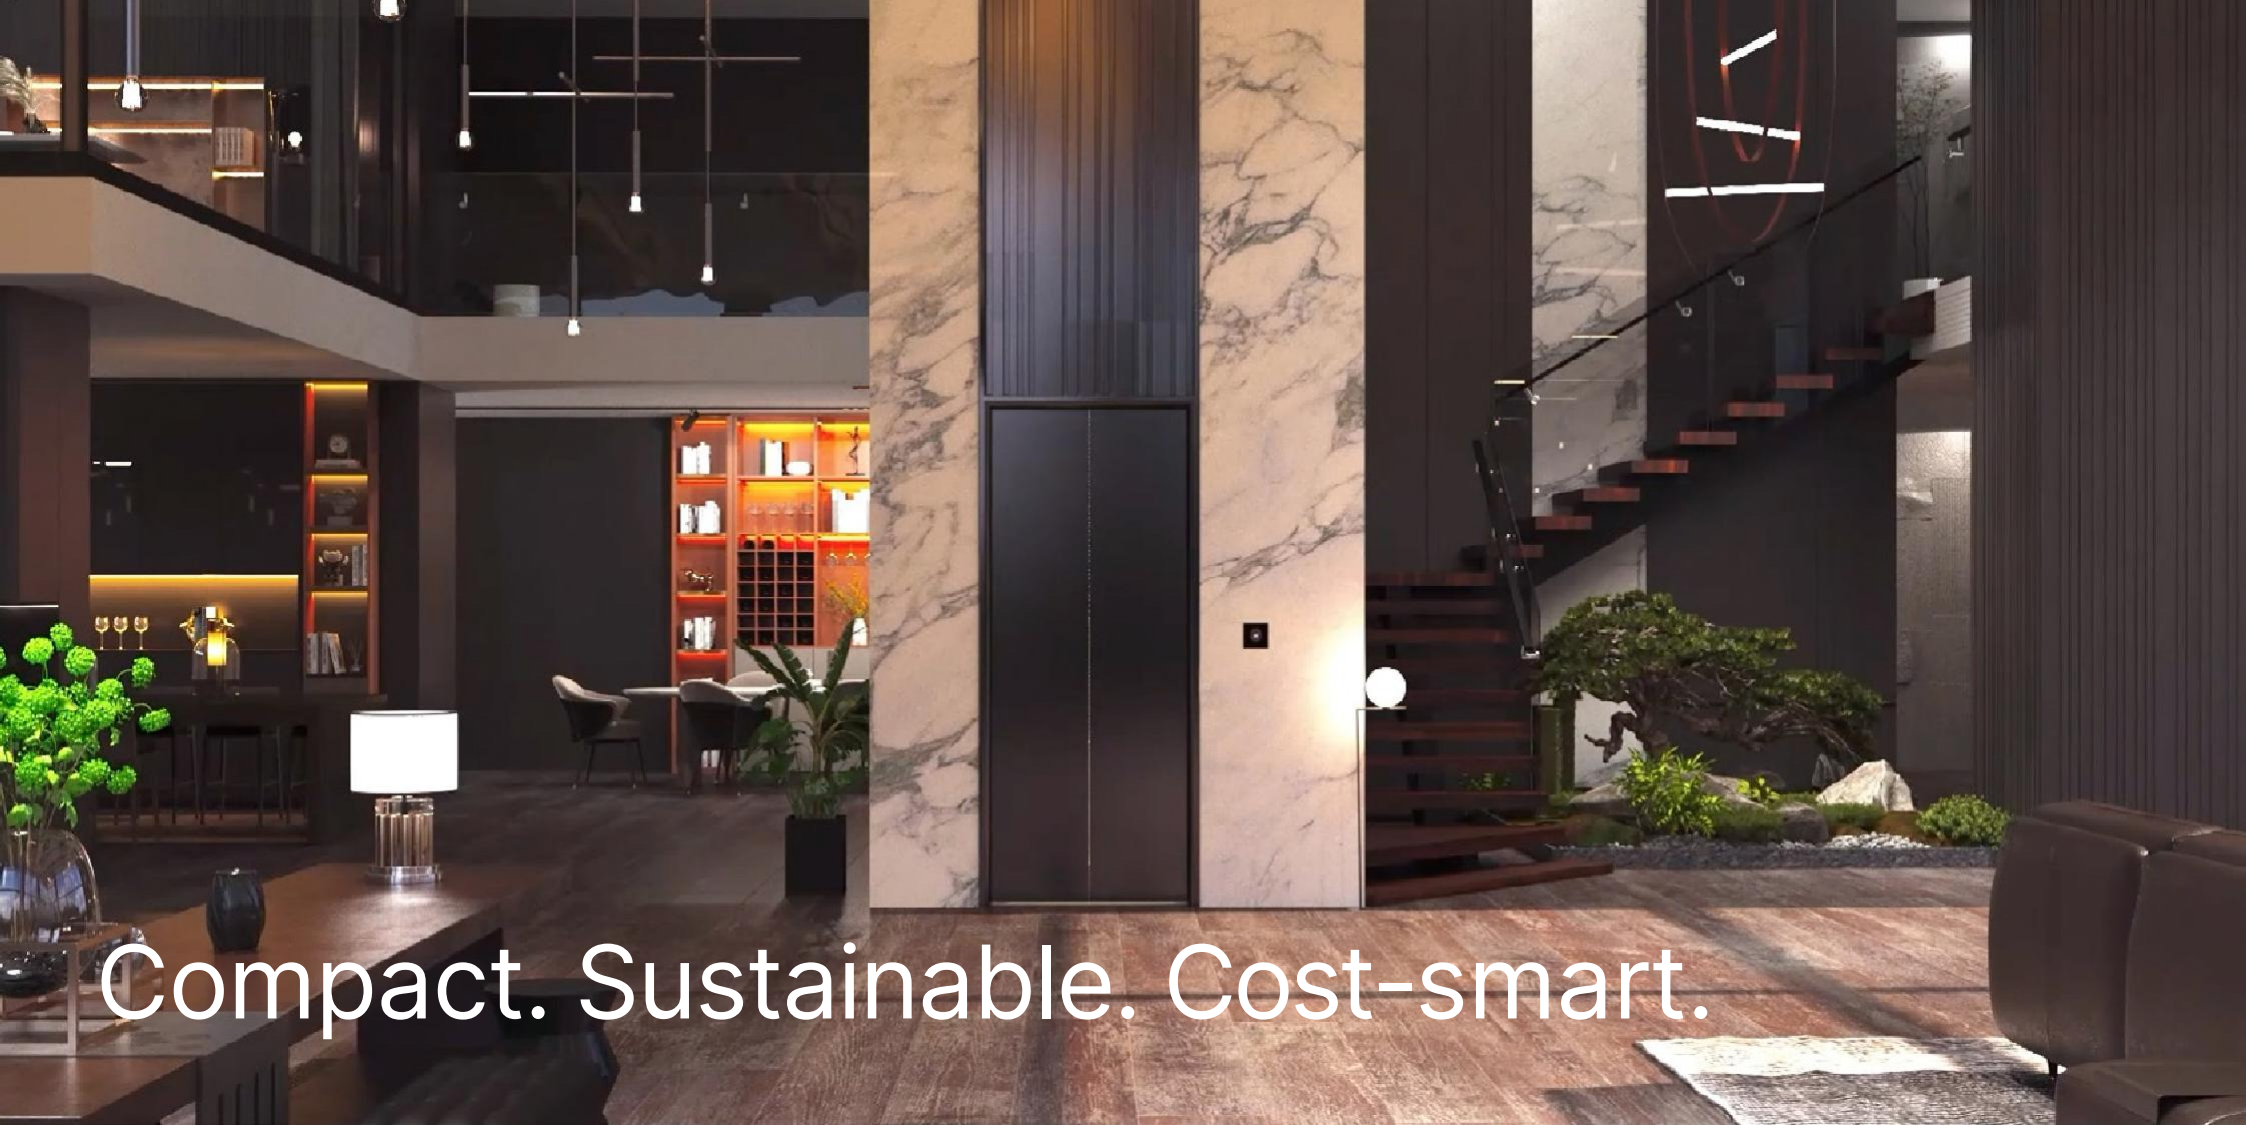

Compact. Sustainable. Cost-smart.

The perfect fit

Optimized for home installation with flexible dimensions that help save space. Choose from six stylish interior options with customizable finishes integrating into any modern home.

Best-in-class eco-efficiency

The smart drive system cuts energy use, lowers electricity costs, and reduces environmental impact—while precision engineering delivers a whisper-quiet, smooth ride.

Safe and reliable performance

Advanced safety features, 24/7 monitoring, and backup power ensure smooth operation—supported by supported by lifetime-focused maintenance and a local service.

Accessibility and comfort

Designed for accessibility with thoughtful features that support ease of use, KONE's proprietary control system ensures a smooth and quiet ride, creating an unrivalled experience for everyone.



Engineered for long-term savings

Fast and easy installation

Keep your project on schedule with our globally proven elevator installation expertise.

Customized maintenance

Reduce downtime and ensure user safety with a tailored maintenance plan that includes quick response times and preventive maintenance, KONE 24/7 Connected Services, you'll be notified when your elevator equipment needs examining – providing you full transparency and improved safety.

Future-proof control system

Adapt to your future needs with an advanced control system that offers maximum flexibility.

Powered by KONE EcoDisc®

Save valuable space with a motorized traction system that's flat enough to be located inside the hoistway.

Smart and stylish home mobility

KONE MonoSpace® Home combines safety, convenience, and elegant design in a compact, energy-efficient package—ideal for modern homes. With built-in KONE DX connectivity, it's future-ready, delivering long-term value and optimized performance.

Load capacity	250/320/400/450Kg
Speed	0.4 m/s, 0.63 m/s and 1.0 m/s*
Max. travel	30 m
Max stops	6
Power supply	380 V, 3-Phase

Built to meet and exceed leading global standards

Car height (CH)	2100/2200/2300/2400 mm
Door height (HH)	2000/2100 mm
Door width (LL)	700/800 mm
Min door size	700W x 2000H
Overhead (SH)	CH + 700 mm
Pit (PH)	200-1150 mm / 450-1150 mm*
Maximum overhead (SH)	5000 mm
Maximum pit (PH)	1150 mm
Code	GB/T 21739-2008


* Please consult local KONE sales representatives for details.



Ceilings



CL21
Lighting:
LED strip light and LED mini spots
Finishing:
PP10FT White powder coated steel,
fine textured finishing (RAL9010)
ST43 Silver brushed stainless steel
ST4 Silver brushed stainless steel
MP1 Silver mirror polished stainless
steel
MS1 Metallic Champagne
MS2 Metallic Coffee



CL72
Lighting:
LED tubes
Finishing:
PP10FT White powder coated steel,
fine textured finishing (RAL9010)
ST4 Silver brushed stainless steel
MP1 Silver mirror polished stainless
steel



CL82
Lighting:
Direct light, LED, colour
Finishing:
ST43 Silver brushed stainless steel
PP10FT Paint fine textured
ST4 Brushed stainless steel SUS304
ST43 Silver brushed stainless steel
MP1 Silver mirror polished stainless
steel



CL198
Lighting:
LED tubes, LED spot
Finishing:
Middle part:
PP10FT White powder coated steel,
fine textured finishing (RAL9010)
Frame:
ST4 Silver brushed stainless steel
MP1 Silver mirror polished stainless
steel

Handrails



HR61/ST4
Round silver
brushed
stainless steel



HR61/ST2
Round gold
brushed



HR61/ST5
Round copper
brushed
stainless steel



HR61/ST6
Round bronze
brushed
stainless steel




HR61/ST7
Round carbon
black brushed
stainless steel




HR61/P70
Round carbon
black brushed
painted steel

Mirrors




MR1
Partial width, partial height


Walls




CB
Carbon black
satin stainless
steel with
anti-fingerprint
coating




METP1FT
Champagne,
fine textured
metallic
painted steel




MP1
Silver mirror
polished
stainless steel




MS1
Metallic
Champagne
printed steel




MS2
Metallic Coffee
printed steel




MS3
Metallic Grey
printed steel




PP10FT
Pure White,
fine textured
painted steel




ST4
Silver brushed
stainless
steel
ST4LH




ST41S
Silver etched
hexagon




ST43
Silver brushed
stainless steel




ST43LH
Silver long
hairline
brushed
stainless steel




ST6AFP
Bronze with
anti-fingerprint
coating




ST8
Champagne
Gold brushed
stainless steel



WS1*
Light wooden
printed steel




WS2*
Warm wooden
printed steel




WS3*
Dark wooden
printed steel

*not available for front wall


Floors



M3H
Black Golden
granite




M7R
Light Sand




D25
Rocky Grey
PVC




D32
Nordic White
PVC




D33
Sandstone
Brown
PVC




D34
Laurent Black
PVC




D6
Light Brown
PVC



MT1
Elegant Black



MT2
Frosty Gray



MT3
White Marble

Car signalisation devices

KDS330 HOME




Touch screen
car operating panel

Physical button
car operating panel

Note: KDS330 Home is not available when service floors > 5

KDS HOME V



Landing signalisation devices



Surface mount landing
call station (LCS)
without key switch



Surface mount LCS
with key switch



Surface mount landing
call station (LCS)
without key switch



Surface mount landing
call station (LCS)
without key switch


KDS330



Partial height car
operating panel




Landing Call Station



Hall Lantern



PLANNING GUIDE

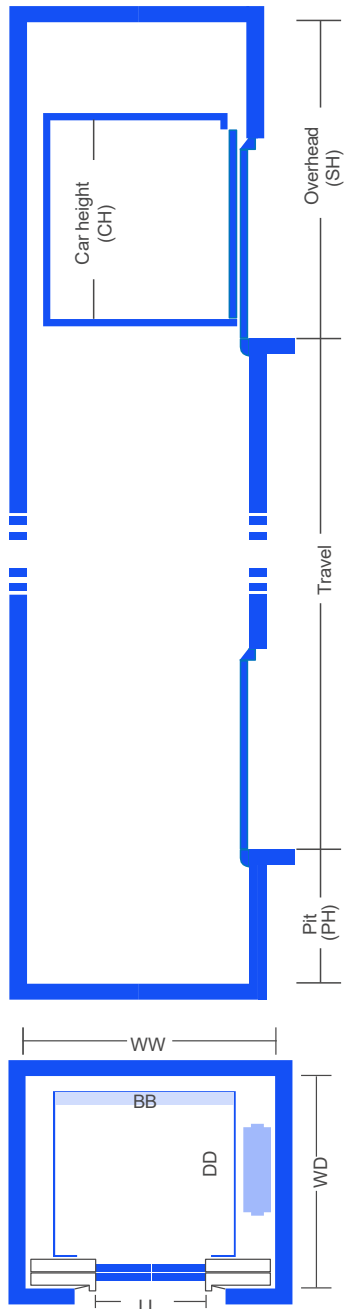

Persons / rated load (kg)	Car size BB × DD (mm)	Door type	Car type	LL (mm)	WW (mm)		WD (mm)	
					NOM	MAX	NOM	MAX
03 / 250	800 × 900	CO	SEC	700	1520	1750	1200	1500
		SO	SEC	700	1350	1550	1285	1500
04 / 320	900 × 1000	CO	SEC	700	1520	1800	1310	1700
		CO	SEC	800	1720	1850	1310	1700
		SO	SEC	700	1450	1800	1385	1800
		SO	SEC	800	1500	1850	1385	1800
		SO	TTC	700	1530	1800	1560	1560
		SO	TTC	800	1680	1850	1560	1560
04 / 320	900 × 1200	CO	SEC	700	1520	1800	1480	1900
		CO	SEC	800	1720	1850	1480	1900
		SO	SEC	700	1450	1800	1550	2000
		SO	SEC	800	1500	1850	1550	2000
		SO	TTC	700	1530	1800	1760	1760
04 / 320	1000 × 900	CO	SEC	800	1680	1850	1760	1760
		CO	SEC	700	1550	1750	1200	1500
04 / 320	1200 × 900	CO	SEC	800	1720	1850	1200	1500
		CO	SEC	700	1750	1950	1200	1500
05 / 400	950 × 1100	CO	SEC	800	1750	1950	1200	1500
		CO	SEC	700	1520	1750	1360	1800
		CO	SEC	800	1720	1850	1360	1800
		SO	SEC	700	1500	1750	1435	1900
		SO	SEC	800	1500	1850	1435	1900
05 / 400	1000 × 1250	SO	TTC	800	1680	1850	1660	1660
		CO	SEC	700	1550	1750	1530	1950
		CO	SEC	800	1720	1850	1530	1950
		SO	SEC	700	1550	1750	1600	2000
		SO	SEC	800	1550	1850	1600	2000
05 / 400	1200 × 1100	SO	TTC	800	1680	1850	1810	1810
		CO	SEC	700	1750	1850	1360	1800
		CO	SEC	800	1750	1850	1360	1800
		SO	SEC	700	1750	1950	1435	1900
		SO	SEC	800	1750	1950	1435	1900
05 / 400	1200 × 1100	SO	TTC	800	1750	1950	1660	1660
		SO	TTC	800	1750	1950	1660	1660

* Please consult local KONE sales representatives for details.

Key

LL	Landing Door Width
LR	Landing rough opening
WW	Shaft Well Width
WD	Shaft Well Depth
BB	Car Width
DD	Car Depth
SEC	Single entrance car
TTC	Through car (entrance front and rear)
CO	Centre opening
SO	Side opening
SH	Shaft headroom (Overhead)
CH	Car height
PH	Pit height



KONE provides innovative and eco-efficient solutions for elevators, escalators, automatic building doors and the systems that integrate them with today's intelligent buildings. We support our customers every step of the way: from design, manufacturing and installation to maintenance and modernization. KONE is a global leader in managing the smooth flow of people and goods throughout buildings. This makes us a reliable partner throughout the life cycle of buildings. We are fast, flexible, and we have a well-deserved reputation as a technology leader, with such innovations as KONE 24/7 Connected Services and KONE UltraRope®. KONE employs over 63,000 dedicated experts to serve you globally and locally.

KONE Indonesia

PT. KONE Indo Elevator (Head Office)

Park Tower 9th Floor - MNC Center Complex
Jl. Kebon Sirih No. 17-19,
Jakarta Pusat 10340
Indonesia

Tel.: +62 21 3006 0418

Email: customerservice.id@kone.com

This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement this publication contains shall be construed as a warranty or condition, express or implied, as to any product, its fitness for any particular purpose, merchantability, quality or representation of the terms of any purchase agreement. Minor differences between printed and actual colors may exist. KONE MonoSpace® DX, KONE EcoDisc® and People Flow® are registered trademarks of KONE Corporation. Copyright © 2024 KONE Corporation.